




Project Profile

Residential Deck Project

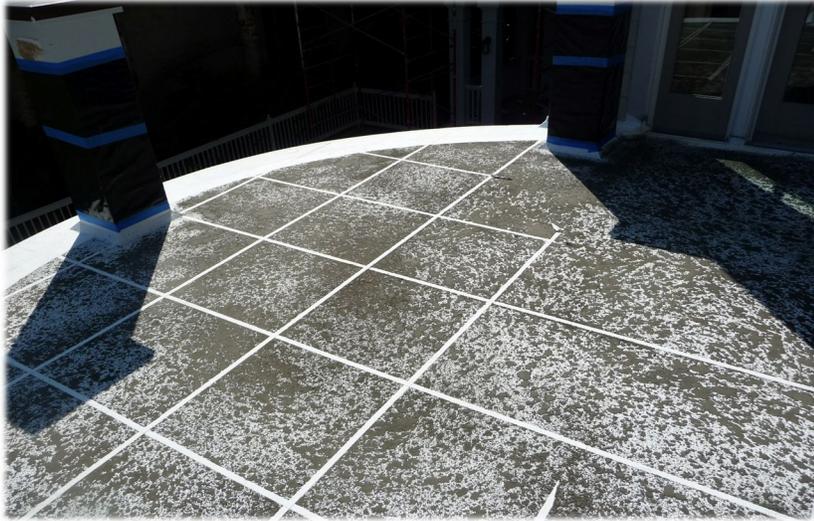

Project Specifications:

- ◆ St. Simons Island, GA
- ◆ Various substrates recovered
- ◆ Multiple deck levels

After the Acrylabs Base System was installed, painter tape was used to stimulate grout lines, Acrycrete slurry was applied with splatter technique, and painter tape was removed creating clean grout lines

About the project:

This project was completed by a more experienced crew working with Acrylabs Acrycrete and DEK-coat. The damaged deck was recovered with lath board and 3/4" T & G plywood. Seams were stripped with 4" fabric then the Base System was installed.



Installing new deck system over old deck



Acrycrete splatter technique knocked down with bull float

Two coats of Acrylabs DEK-coat finish applied

