


PRODUCT DATA & TECHNICAL DATA

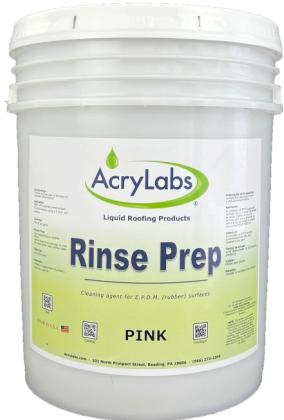

SDS

Rinse Prep

DESCRIPTION AcryLabs Rinse Prep is an easy to use and water based EPDM cleaner that is formulated to promote maximum adhesion of A.L.A.R.M. - *Systems*. It is used to remove the oxidized carbon black from the EPDM surface and can also be used on other existing roof surfaces that require a cleaning.

APPLICATION Rinse Prep can be sprayed using a pump type garden sprayer. Application rate (approximately 500 SF per gallon) will vary with the condition of the surface. Allow ten to fifteen minutes to activate before power washing, with a minimum of 3000 psi.

SURFACE PREP Surface must be clear of all loose or collected contaminants.

PACKAGING Rinse Prep is available in 1 and 5 gallon plastic containers.

COVERAGE Rinse Prep will yield approximately 500 SF per gallon.

DRYING TIME Varies depending on weather factors. Wait at least 10-15 minutes or until dry, then power wash surface clean.

CLEAN-UP Water

WARRANTY Limited to replacement of product.

PROPERTY	RESULT	TEST METHOD
VISCOSITY	Same as water	ASTM D-562-01
PH	13 - 13.5	ASTM E-70-97
WEIGHT PER GALLON	8.3 LBS	ASTM D-1475

Meets and exceeds ASTM D6083 requirements.



Corporate Offices: 101 North Prospect Street, Reading, PA 19606 · (866) 273-1355